



Bernad[®]
equipamiento industria alimentaria

COMPLETE SINGLE RAIL BRACKET


Single die-cast aluminium bracket for anchoring the twin rail

ALUMINIUM

TWIN-RAIL

MEAT INDUSTRY

ANCHORING

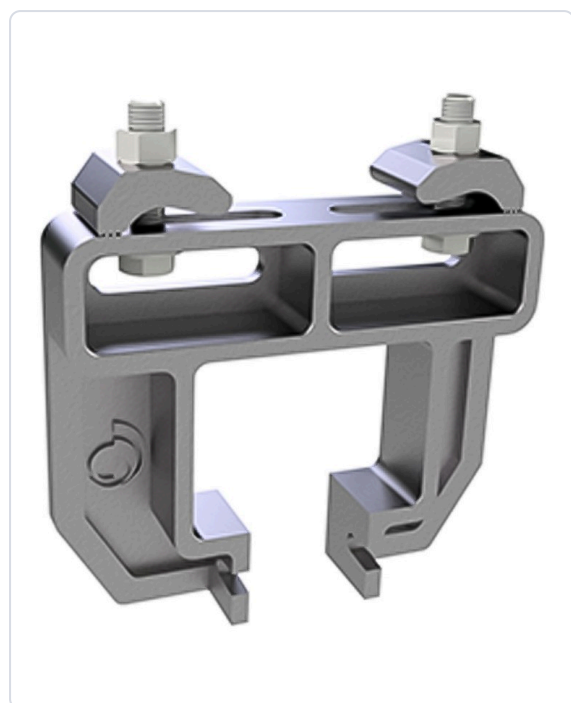

DESCRIPTION

Single rail bracket for anchoring and supporting the rail, ensuring the twin-rail track is properly secured to the building structure.

Die-cast in L-2640 aluminium alloy, vibrated and polished. It is 15 cm high and supplied complete with anchor clamps and stainless steel fasteners.

CONSTRUCTION AND STANDARD EQUIPMENT

- Die-cast L-2640 aluminium alloy
- Vibrated and polished finish
- Bracket height: 15 cm
- Anchor clamps and stainless fasteners included

KEY DATA

Type	Single	Material	Aluminium L-2640	Process	Die-cast
Finish	Vibro-polished	Height	15 cm	Fasteners	Stainless steel

MODELS AND DIMENSIONS

REF.	CONFIGURATION	HEIGHT	SUITABLE FOR
245000034	Single rail bracket	15 cm	Twin-rail network

Custom manufacturing on request. Compatible with the Bernad twin-rail overhead conveyor system.

APPLICATIONS

Installation of overhead rail systems in slaughterhouses, cutting rooms and meat plant cold rooms.

For information only. Specifications, dimensions and finishes may change without notice due to product improvements. The image is indicative. Please request a quotation to confirm dimensions, materials and lead times.